

**Heavy Gauge Metal** (20ga or thicker)**Product #240A****Bugle Head DRIVALL® Self Drilling** (1 OF 2)

**Attaches drywall or wood to heavy gauge metal 20-12 gauge. Bugle head creates a smooth professional finish.**

**Finish - Black/Gray Phosphate, Clear Zinc and GRABBERGARD**



Bugle  
Head



Drill Point



#2 Phillips  
Drive

**APPLICATIONS**

- ▶ Self-drilling screws used to attach drywall to heavy gauge metal 20-12 gauge.
- ▶ Gypsum board to 20-12 gauge steel studs and track
- ▶ Insulation to steel, 20-12 gauge
- ▶ Collated or Bulk

**PRODUCT FEATURES**

- ▶ ACQ and Fire Treated wood Compliant with GRABBERGARD Coating
- ▶ 14 TPI
- ▶ Bugle head creates a smooth professional finish.
- ▶ #2 Phillips recess drive
- ▶ Drill point is designed for penetration into 20-12 gauge steel

**SPECIFICATIONS**

- ▶ Gauge - #8
- ▶ Length — 1-1/4"
- ▶ Head Type — Bugle
- ▶ Recess Type — #2 Phillips or LOX®
- ▶ Thread Type — Single Lead
- ▶ Finish — Black/Gray Phosphate, Clear Zinc and GRABBERGARD®
- ▶ GRABBER® screws are manufactured in an ISO 9002 and ISO 14001 certified and approved factory, and are approved by ICC-ES ESR#1271

**INSTALLATION GUIDELINES**

- ▶ Use a standard screwgun with a depth-sensitive nose piece. Suggested screwgun specification for optimal performance — 4 amps minimum and 2500 RPM.
- ▶ The Bugle head is fully seated when the head is flush with the work surface.
- ▶ Overdriving may result in failure of the fastener or strip out of the work surface.
- ▶ Minimum 2500 rpm 4 amp screwgun recommended
- ▶ Install screws flush with surface, or with a countersink

**Heavy Gauge Metal (20ga or thicker)**
**Product #240A**
**Bugle Head DRIVALL® Self Drilling** (2 OF 2)

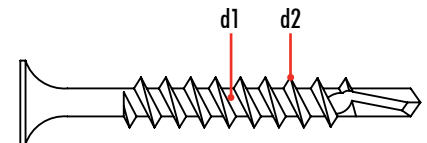

**PRODUCT SIZES AND ORDERING INFORMATION**

Catalog No.	Gauge/Length	Length Metric	Quantity Per Carton	Weight Per Carton
13A	#6x1"	25 mm	10 M	33.00(lbs)
14ZA	#6x1-1/4"	32 mm	8 M	33.00(lbs)
15A	#6x1-5/8"	41 mm	5 M	27.00(lbs)
15ZA	#6x1-5/8"	41 mm	5 M	27.00(lbs)
16A	#6x1-7/8"	47 mm	4 M	27.00(lbs)
16ZA	#6x1-7/8"	47 mm	4 M	27.00(lbs)

\*Collated screw packaging option available on selected items.

**STANDARD CORROSION TEST RESULTS**

Finish	Test	Standard/Protocol	Results
Black/Gray Phosphate	Salt Spray Results	ASTM B117	24 hours, no red rust
Yellow Zinc	Salt Spray Results	ASTM B117	48 hours, no red rust
Clear Zinc	Salt Spray Results	ASTM B117	24 hours, no red rust
GRABBERGARD	Salt Spray Results	ASTM B117	1,000 hours, no red rust
GRABBERGARD	Kesternich Results	DIN 50018, 2.0L	15 cycles, no red rust


**DRILLING CAPACITY**

Screw Gauge	Drill Point	Max Panel Thickness	Steel Thickness Gauge Range
6	3	0.090-0.110	20-12
8	3	0.100-0.140	20-12
10	3	0.110-0.175	20-8

All GRABBER® screw products are manufactured in facilities that are ISO 9002 and ISO 14001 certified and approved. The fasteners comply with ASTM C954, as referenced in ICCES report ER-5280, are approved for use in structures governed by the International Building Code 2006, 2009, 2012, International Residential Building Code 2006, 2009, and 2012.

